



# IN GROUND RECESSED UPLIGHT



## Outer Dimensions Unit:mm

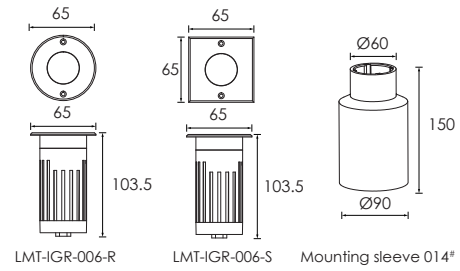


## Optional Honeycomb Louver

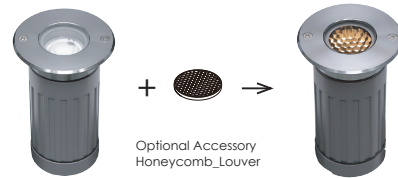

## Product Specifications

Housing	12# Die-casting grey powder coated aluminum. T=60-80µm Adhesion of ISO class 1/ASTM class 4B
Front cover	Hard chromeplated stainless steel SUS 316#
Light Window	Tempered frosted step glass.T=7mm
LED	OSRAM
Glass pressure capacity	Full area=783kgs
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input,Constant Current Output
Operating temperature	-20°C – 40°C
Power Cable	H05RN-F 2X1.0mm <sup>2</sup> L=0.5m(Low voltage) H05RN-F 3X1.0mm <sup>2</sup> L=0.5m(High voltage)
Mounting sleeve	ABS 014#
Dimmable Support	Triac PWM 1-10V Dali
Warranty	3 years against manufacturing defect




## Lens



## LED Colour Temperature

- A 2000K
- B 3000K
- C 6000K

Item	Power (W)	Beam angle	Input voltage(V)	Typical operating current(mA)	Typical consumption (W)	Typical luminance(lm)	IP Rating
LMT-IGR-006-R	1×3 Watts	30°	24V DC/ 120/240 AC	24V = 187 120V = 61 240V = 34	24V = 4.5 120V = 4.3 240V = 4.3	Cool white = 305 Warm white = 267	IP 67
LMT-IGR-006-S							

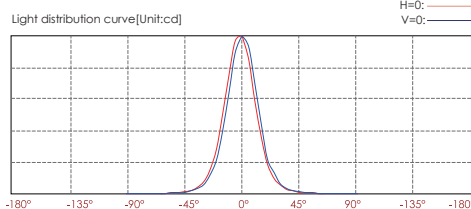

Center beam LUX	Beam width V	Beam width H
230.79 LUX	0.9m	0.9m
57.70 LUX	1.9m	1.9m
25.64 LUX	2.8m	2.8m
14.42 LUX	3.8m	3.8m
9.23 LUX	4.7m	4.7m
6.41 LUX	5.7m	5.6m

Ver.Spread:26.7 Horiz.Spread:26.5