


# RECESSED STEP/WALL LIGHT

## Asymmetrical



### Outer Dimensions Unit:mm

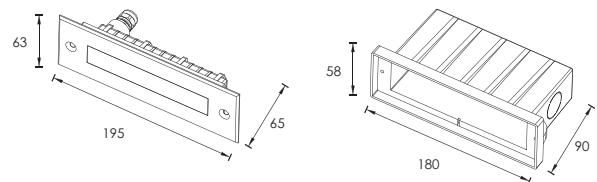

### Lens



45°  
35°

Mounting sleeve

### Product Specifications


Housing	12# Die-casting grey powder coated aluminum T=60-80um Adhesion of ISO class 1/ASTM class 4B
Front cover	Hard chrome-plated stainless steel 316L
Light Window	Step tempered glass.T=8mm
Cable gland	IP68 PG-9 PA66
Gasket	Tooling shaped seal
LED Driver	Constant Voltage Input,Constant Current Output
Operating temperature	-20°C - 40°C
Power Cable	H05RN-F 2X1.0mm <sup>2</sup> L=0.5m (low voltage) H05RN-F 3X1.0mm <sup>2</sup> L=0.5m (high voltage)
Mounting sleeve	ABS
Dimmable Support	Triac PWM 1-10V Dali
Warranty	3 years against manufacturing defect





### LED Colour Temperature

- A 2000K
- B 3000K
- C 6000K

Model No.	Power (W)	Beam angle	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IP Rating
<b>LMT-RSWL-014</b>	3×2 Watts OSRAM	45° 35°	24V DC/ 120/240V AC	24V = 200 120V = 89 240V = 46	24V = 5.70 120V = 6.20 240V = 5.70	Cool white =400 Warm white =285	IP65



LMT-RSWL-014

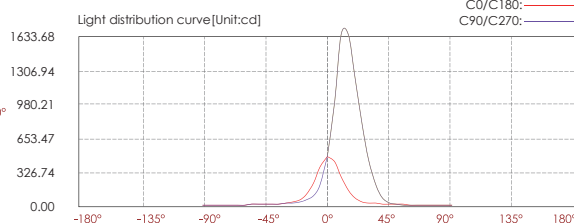

Distance	Center beam LUX	Beam width V	Beam width H
2m	116.23 LUX	0.7m	0.6m
4m	29.06 LUX	1.5m	1.3m
6m	12.91 LUX	2.2m	1.9m
8m	7.26 LUX	3.0m	2.5m
10m	4.65 LUX	3.70m	3.10m
12m	3.23 LUX	4.5m	3.8m